



## City Ranger 2250 Flail Mower/Verticutter

*Grass has no chance when the flail mower is in action. This is serious mowing. With a clearing width of 1,226 mm, the flail mower mows all grass, whatever its height or toughness. It fine-cuts the mowed grass, so it is left behind in haystack like formations. Extremely practical and user-friendly.*



Changing the flails with vertical blades (available from authorised Nilfisk Outdoor dealers) converts the flail mower into a verticutter, which deals with moss and weeds without the need for pesticides. The verticutter removes moss while simultaneously cutting a thin score in the turf, so the grassroots are aired. This strengthens the grass so the turf is much more resilient to weeds.

The flail mower/verticutter is a two-in-one attachment that gives full value for money.




*When you change attachments, the City Ranger 2250 hydraulic hoses are connected at the turn of a handle!*



# Technical data

## Flail Mower/Verticutter

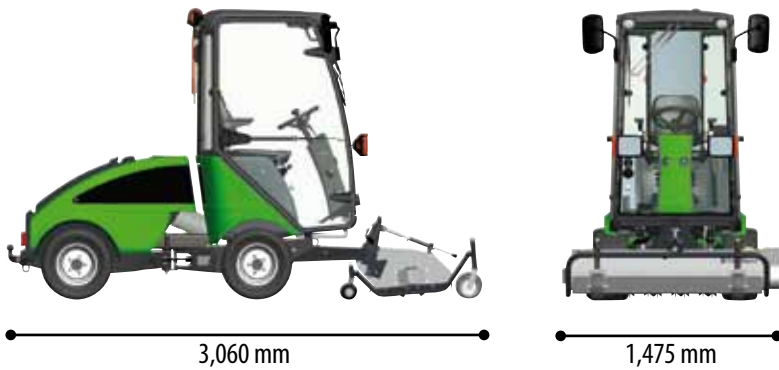

### Flail Mower

Clearing height adjusted using the two forward wheels (rough and fine adjustment)  
Rough adjustment using seven adjusting rings in interval 0–110 mm Fine adjusting carried out by a variable-adjustable lever in the following intervals:

No. of adjusting rings	0	1	2	3	4	5	6	7
Clearing height (mm)	0-50	3-58	11-63	18-70	25-78	33-95	40-103	47-110

### Vertical cutting process:



Weeds are eliminated

Grass roots are aired

### Extra equipment

**Top filter:** Nilfisk Outdoor recommend the use of a top filter for lawn mowing as this stops the radiator from becoming choked with grass and protects the motor. Top filters are available from authorised Nilfisk Outdoor dealers

**Counterweight:** Nilfisk Outdoor recommend you use a counterweight on the back of the City Ranger 2250 when using the flail mower.

### Dimensions

#### Attached:

Length	3,060 mm
Width	1,475 mm
Height	1,960 mm

#### Storage dimensions:

Length	955 mm
Width	1,475 mm
Height	530 mm

### Technical data – flail mower:

Weight	151 kg
Clearing width	1,226 mm
Clearing height	0-110 mm
No. of flails	76
Rpm	2,800

### CE certified according to EU Directive

### Technical data – verticutter:

Clearing width	1,172 mm
Clearing height max.	0-15 mm
No. of vertical blades, max.	38
rpm, max.	2,800

### CE certified according to EU Directive

**Your Nilfisk Outdoor Dealer**